
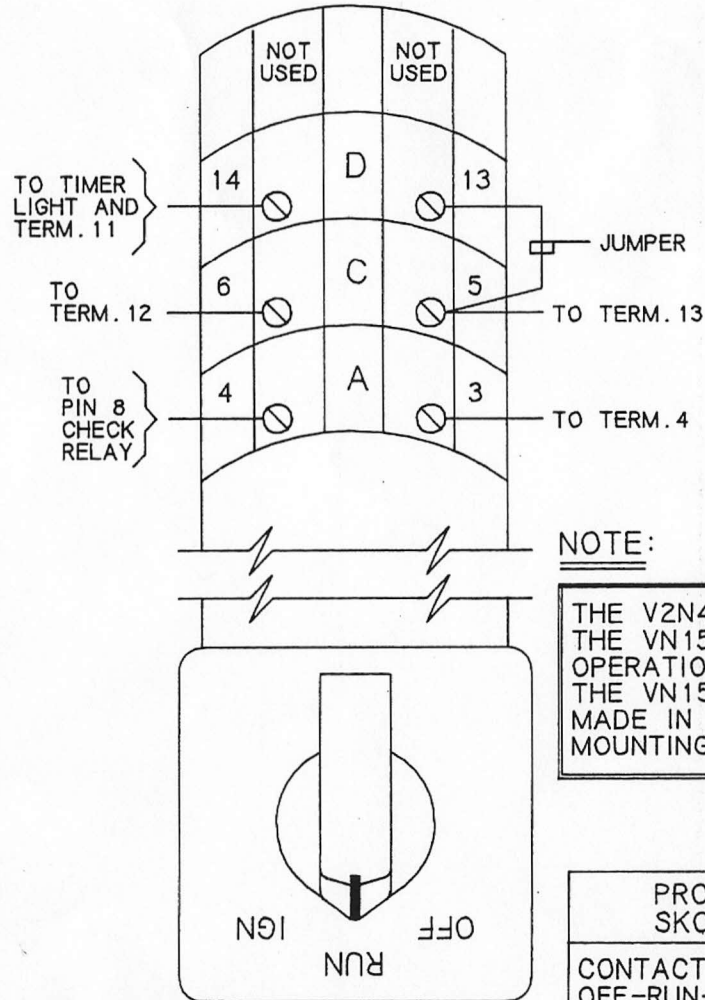


NOTES:

△ — TO TERMINAL 3 (MULTI-BURNER).
NOT USED IN SINGLE BURNER.

* — TO PIN-6 FLAME RELAY (SINGLE BURNER).
TO PIN-4 LOAD RELAY (MULTI-BURNER).

THIS CONTACT BLOCK
USED ON MULTI-BURNER
CONTROL ONLY. NOT USED
ON SINGLE BURNER CONTROL.

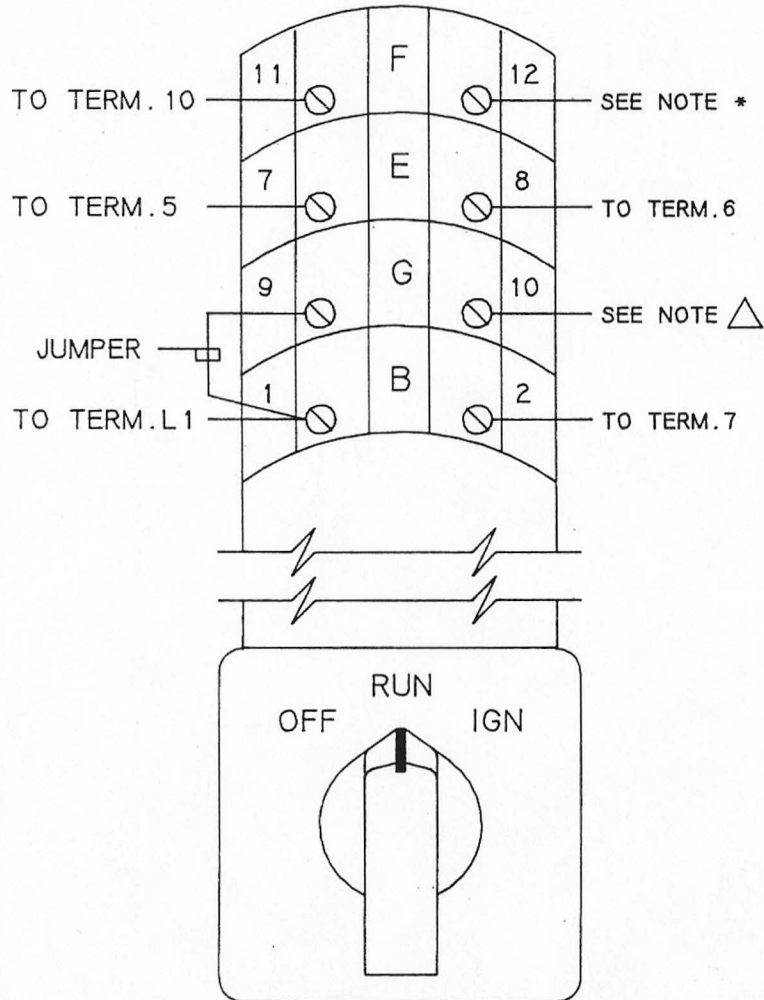

3 POS. SEL. SW. SPRING RETURN FROM RIGHT TO CENTER			
	OFF	RUN	IGN.
CONTACT BLOCK	OPERATION		
B	O	X	X
C	O	O	X
G	X	X	O
D	X	X	O
A	O	X	X
E	O	O	X
F	X	X	O

NOTE:

THE V2N4T911-UL SWITCH SUPERSEDES
THE VN154T911-UL AND IS IDENTICAL IN
OPERATION. IF IT IS USED TO REPLACE
THE VN154T911-UL, A NOTCH MUST BE
MADE IN THE TOP OF THE EXISTING
MOUNTING HOLE TO PREVENT ROTATION.

SWITCH NO. V2N4T911-UL
THREE POSITION OPERATOR
SPRING RETURN FROM
RIGHT TO CENTER.

PROTECTION CONTROLS INC. SKOKIE, ILLINOIS			
CONTACT CONFIGURATION FOR V2N4T911-UL OFF-RUN-IGNITION SWITCH AS USED ON UNIFIED CONTROL PANEL NO. 62021			
JOB NO.	DRAWN BY	DATE:	DRAWING NO.
	R.N.	9-21-01	X-375